
VL-1080

IP Broadcast Central Control Unit



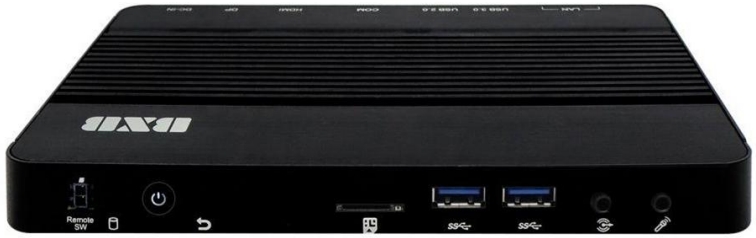

Specifications	
OS	Ubuntu 24.04 LTS
Processor (CPU)	Intel® Celeron® J3455 1.50 GHz (Up to 2.30 GHz), Quad-Core
Memory (RAM)	8GB DDR3 (800 MHz x 2)
Storage	512GB
Front Panel I/O	USB 3.0 x 2 Line-Out x 1 Mic-In x 1
Rear Panel I/O	DIN-9 RS-232 x 1 USB 2.0 x 1 ; USB 3.0 x 1 RJ-45 TCP/IP x 2 HDMI 1.4 Out x 1 ; Displayport Out x 1 Power Jack (DC-In) x 1

Dimensions (HWD)	20 x 200 x 137.8 mm
Weight	0.9Kg (Excluding AC Adapter)
Operating Temperature	0°~50°C
External Power Supply	DC 12V 3A MAX
Voltage / Frequency	110/220V
Included Power Adapter Output	36W
Package Contents	CCU-3 x 1 USB License Key x 1 Keyboard & Mouse Set x 1 Activation Guide x 1

VL-1030

IP Broadcast Multimedia Distributor





Specifications	
SYSTEM LAN Port	RJ45 TCP/IP x 1 (POE)
External Network Port	RJ45 TCP/IP x 1
Audio Signal	3-Pin Euroblock Connector x 1
RS-485 Communication	3-Pin Euroblock Connector x 1
RS-232 Communication	3-Pin Euroblock Connector x 1
N.O. Trigger Interface	2-Pin Euroblock Connector x 2
Status Indicators	LED Indicators x 2

Dimensions	26*215*105 mm (Excluding Rack Mount Brackets) 26*237*105 mm (Excluding Rack Mount Brackets)
Weight	0.53 KG (Excluding AC Adapter)
External Power Supply	DC 5V-3A MAX
Voltage / Frequency	110/220V
Max Power Consumption	12.5W
Standard Power Adapter Weight	0.1KG

VL-1010

IP Broadcast Decoder





Specifications	
SYSTEM LAN Port	RJ45 TCP/IP x 1 (POE)
External Network Port	RJ45 TCP/IP x 1
Audio Signal	3-Pin Euroblock Connector x 1
RS-485 Communication	3-Pin Euroblock Connector x 1
RS-232 Communication	3-Pin Euroblock Connector x 1
N.O. Trigger Interface	2-Pin Euroblock Connector x 2
Status Indicators	LED Indicators x 2

Dimensions	26*215*105 mm (Excluding Rack Mount Brackets) 26*237*105 mm (Excluding Rack Mount Brackets)
Weight	0.53 KG (Excluding AC Adapter)
External Power Supply	DC 5V-3A MAX
Voltage / Frequency	110/220V
Max Power Consumption	12.5W
Standard Power Adapter Weight	0.1KG

VL-MC1

IP Multi-functional Controller





Specifications	
SYSTEM LAN Port	RJ45 TCP/IP x 1 (POE)
External Network Port	RJ45 TCP/IP x 1
Audio Signal	3-Pin Euroblock Connector x 1
RS-485 Communication	3-Pin Euroblock Connector x 1
RS-232 Communication	3-Pin Euroblock Connector x 1
N.O. Trigger Interface	2-Pin Euroblock Connector x 2
Status Indicators	LED Indicators x 2

Dimensions	26*215*105 mm (Excluding Rack Mount Brackets) 26*237*105 mm (Excluding Rack Mount Brackets)
Weight	0.53 KG (Excluding AC Adapter)
External Power Supply	DC 5V-3A MAX
Voltage / Frequency	110/220V
Max Power Consumption	12.5W
Standard Power Adapter Weight	0.1KG

System Diagram

