
WS-802T

Two-way Ceiling Speaker (Transformer)

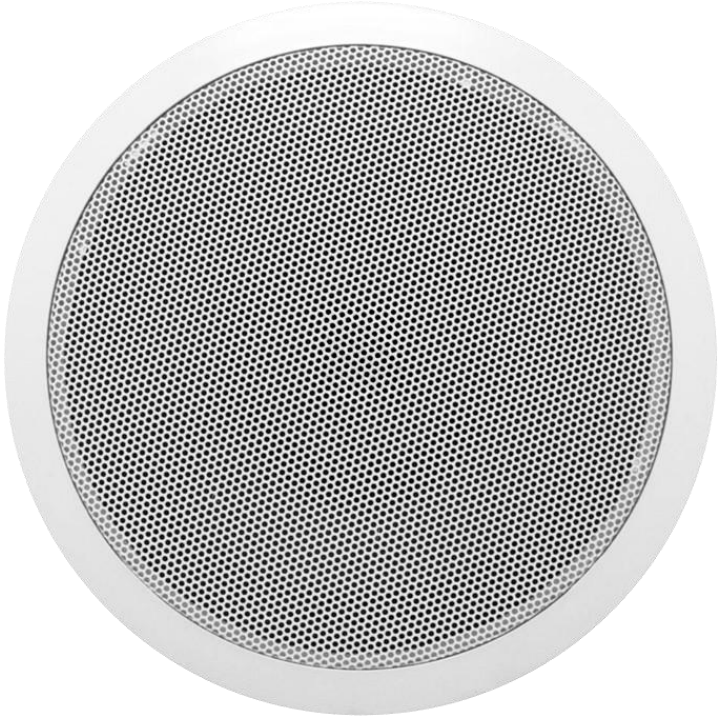

Product Features

- ABS integrated molding, ivory white appearance soft and non-reflective, easy to blend into the environmental layout, providing consistency with decoration.
- Speaker unit: Coaxial dual-sound (2-inch tweeter / 8-inch woofer; PP moisture-proof material).
- Speaker unit power handling: 20W / 8Ω.
- Speaker sensitivity: Greater than 92dB.
- Frequency response: Better than 60~20KHz.
- Equipped with a high-pressure PA 100V input matching transformer (2W / 4W / 6W input selectable).
- Uses safety rounded spring clips embedded in the ceiling for easy and safe installation without causing damage to hands.

Product Specifications	
Rated Input	20W / 8Ω
Input impedance	100V Line / 2W-5KΩ / 4W-2.5KΩ / 6W-1.67KΩ
S.P.L	90dB
Max S.P.L	2W-95dB / 4W-98dB / 6W-100dB
Frequency response	60 - 20KHz
Speaker Unit	Two-way；Bass 8" / Treble 2"

Product Specifications	
Dimension	234 x 95 mm
Weight	1.3 kg
Box Material	ABS；PP moisture-proof
Embedded hole size	207mm
Installation method	Ceiling

BXB
ADD 6F-1, No.288-5, Xinya Rd., Qianzhen Dist., Kaohsiung City 806604, Taiwan
TEL +886 7 9703838
FAX +886 7 9703883
MAIL bxb@bxb.tw
WEB www.bxbsystem.com