
WMP-3180


Central Control Unit

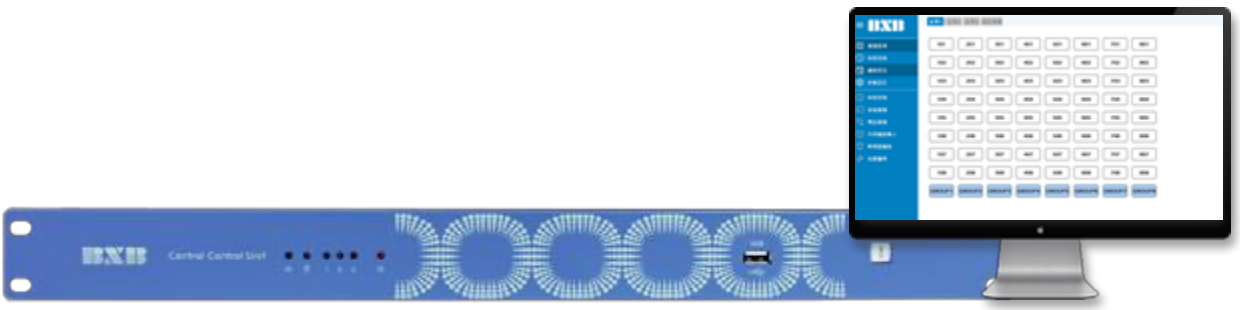

Product Features

- TCP/IP protocol control: Transmits sound and control signals over the network.
- Can control up to 192 single zones + 70 group zones: Can arrange and replicate the graphic control interface based on the actual areas.
- Automatic schedule publication: Can execute scheduled broadcasts for hourly chimes, daily routines, and special events, and automatically play them.
- Built-in dual network cards: Can simultaneously operate independent local networks and external internet connections for convenience and efficiency.
- Equipped with a service button: If any abnormality is detected in the system, pressing the service button will automatically send user information, device status, and abnormal issues back to BXB company for immediate remote connection and resolution.
- Hard disk system restoration mechanism settings: Upon restart, the system will automatically revert to its original state to prevent intrusion by other programs or viruses.
- Integration with TP-2 Telephone Paging Gateway to achieve telephone broadcasting.
- Volume control can be applied to various audio matrices.

Graphical Control Software Interface

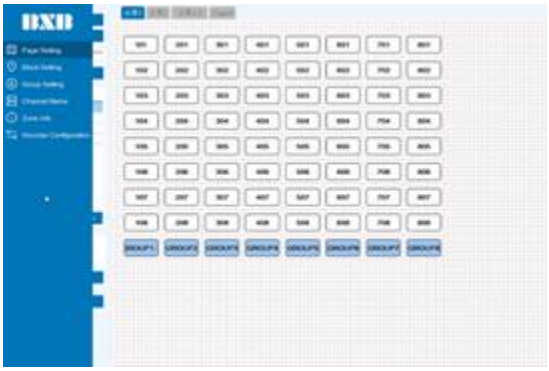



Specifications

Hardware Specifications

RS-232 Communication	DIN-9PIN x 2
USB Communication	USB 2.0 x 1 & USB 3.0 x 6
Network Communication	RJ-45 TCP / IP x 2
Display Output	HDMI Output x 1 Displayport x 2
Audio Interfaces	Linear Audio Output x 1 Linear Audio Input x 1 Microphone Audio Input x 1
Storage Capacity	512 G

Physical Dimensions

Dimensions (HWD)	482 x 205 x 44.5 mm
Rack Mount 19"	1U
Weight	3 Kg (excluding transformer)
Storage Temperature	-20° to 80°C
Operating Temperature	0° to 60°C

BXB
ADD 6F-1, No.288-5, Xinya Rd., Qianzhen Dist., Kaohsiung City 806604, Taiwan
TEL +886 7 9703838
FAX +886 7 9703883
MAIL bxb@bxb.tw
WEB www.bxbsystem.com