TP-2

Telephone Paging Gateway



Product Features

- Connects the existing PBX and integrate with BXB SPA-1050 Streaming Public Address Processor and WMP-1206 Speaker Circuit Zone Selector to execute telephone broadcasting.
- Supports SIP VoIP v 2.0 standard protocol.
- Equipped FXS + FXO connect ports.
- Supports WLAN and LAN ethernet connection.

Specification

Interface

Phone Port	FXS x 1
	FXO x 1
Network Port	WLAN x 1
	LAN x 1
Button	Reset x 1

LED Indicator

Power x 1
Status x 1
Ready x 1
WLAN x 1
LAN x 1
FXS x 1
FXO x 1


Physical Properties

Dimensions (WDH)	90 x 75 x 24 mm
Weight	80g


Power Supply

Working Power	AC 100V~240V
	DC 12V/0.5A (MAX)

Integration with Streaming PA Processor

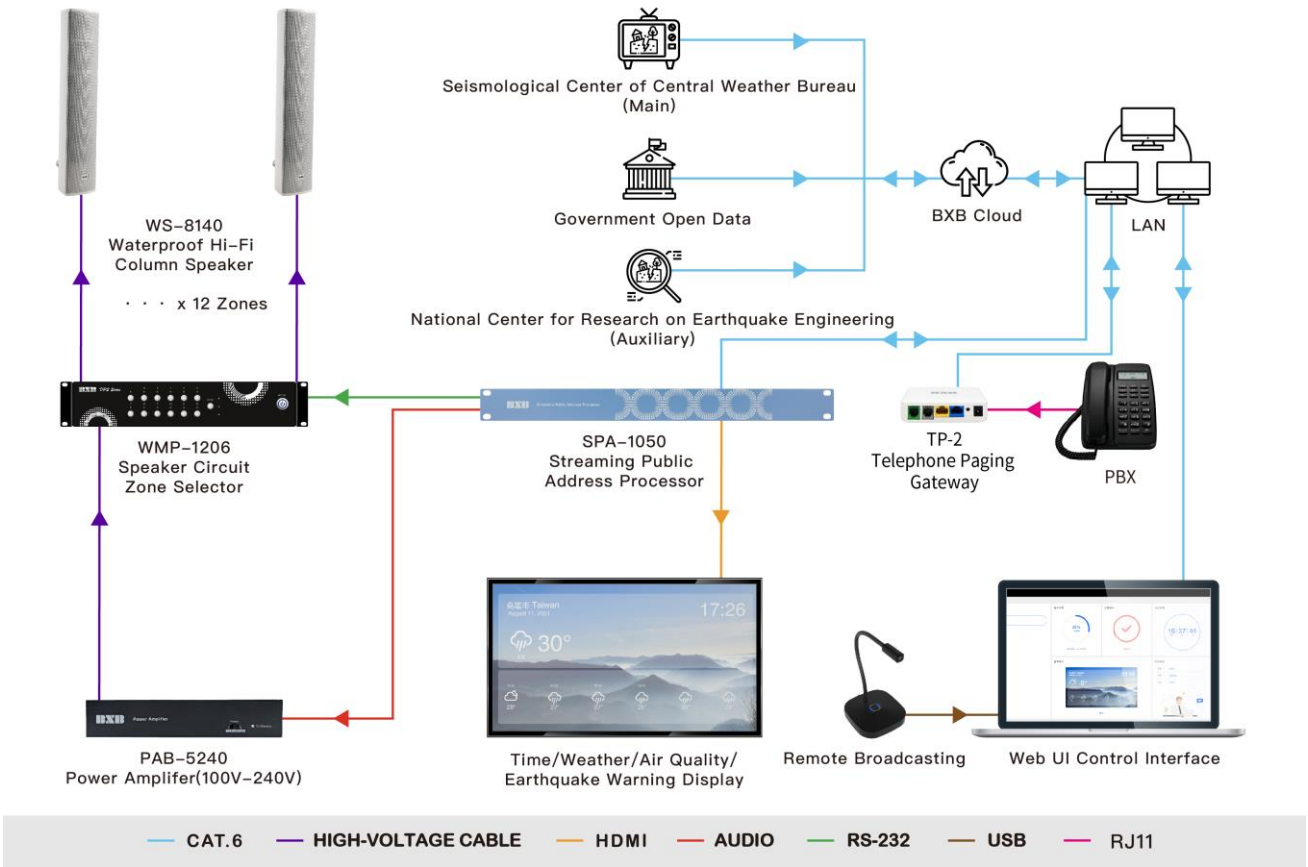

Rear Panel

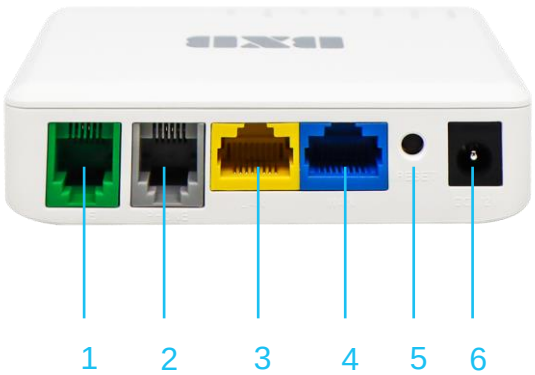

1. FXO port
2. FXS port
3. LAN ethernet port
4. WLAN ethernet port
5. Reset button
6. Power port

ADD 6F-1, No.288-5, Xinya Rd., Qianzhen Dist., Kaohsiung City 806604, Taiwan
TEL +886 7 9703838
FAX +886 7 9703883
MAIL bxb@bxb.tw
WEB www.bxbsystem.com