
PA-120-V1

綜合擴大機

產品使用手冊




前面板說明

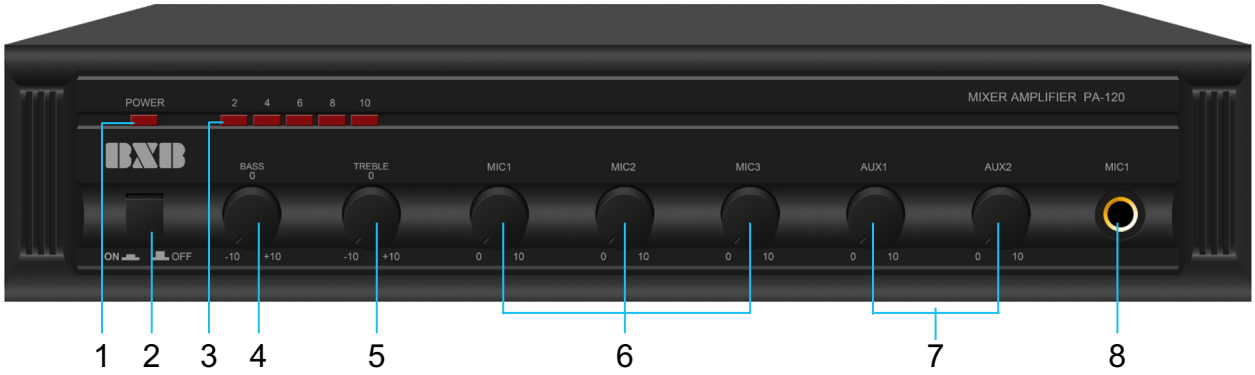

1. 電源指示燈
2. 電源開關
3. LED 音量指示
4. 低音調整
5. 高音調整
6. 麥克風音量調整
7. 線性音源音量調整
8. 麥克風輸入 1 接埠 (具備優先權)

後背板說明

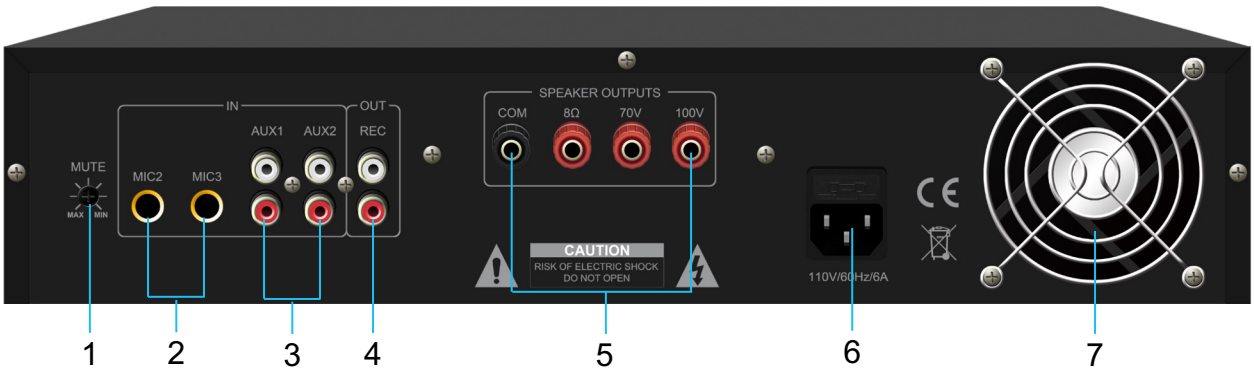

1. 抑制音量調整：
   麥克風輸入1優先權音量抑制設定，當麥克風輸入1有音源輸入時，抑制其他輸入量級設定。
1. 麥克風輸入 2、3 接埠
3. 線性音源輸入 1、2 接埠
4. 輔助輸出
5. 高壓音源輸出
6. 電源輸入
7. 風扇口

設備連接



性能規格

額定輸出功率	120W
輸出電壓調整率	由滿載到空載，≤3dB
輸出方式	8Ω，70V、100V定壓輸出
輔助輸出電平	≥700 mV
最小源電動勢	話筒：≤3.3mV（不平衡）
	線路：≤300mV（不平衡）
頻率回應	80Hz-16KHz（±3dB）
總諧波失真	≤1%（1KHz，正常工作條件）
信噪比	線路輸入：≥74dB（寬頻）
音調調整範圍	低音：±10dB（100Hz）
	高音：±10dB（10kHz)
保護	交流保險絲，直流輸出，超載，短路。
優先輸入功能	Mic1 輸入覆蓋其它輸入（衰減0 到 -30dB）
電源	AC 110V/50Hz
額定功耗	250W
外包裝尺寸（mm）	520×430×195（L×W×H）
機器尺寸（mm）	483×338×88（L×W×H）
毛重	10.8kg
淨重	9kg

設備名稱：綜合擴大機
Equipment name
型號（型式）：PA-120
Type designation (Type)

單元Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr+6)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
電源線	○	○	○	○	○	○
電路板	○	○	○	○	○	○
金屬外殼	○	○	○	○	○	○
內部線材	○	○	○	○	○	○

備考1.〝超出0.1 wt %〞及〝超出0.01 wt %〞係指限用物質之百分比含量超出百分比含量基準值。
Note 1：“Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.
備考2.〝○〞係指該項限用物質之百分比含量未超出百分比含量基準值。
Note 2：“○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.
備考3.〝-〞係指該項限用物質為排除項目。
Note 3：The “–” indicates that the restricted substance corresponds to the exemption.